1. Код

PVB15-RSY-31-CM-11

PVB	Серия
15	Типоразмер
R	Направление вращения вала: по часовой стрелки
S	Зона смещения (изменение рабочего объема): одна сторона от центра
Y	Исполнение вала: цилиндрический вал Ø25.12, шпонка 6.4x22.3
31	Код исполнения
CM	Регулятор давления (17-100 бар)

2. Технические характеристики:

Типоразмер		**15**
Рабочий объем	см^3/об	33
Давление, бар	ном.	100
	макс.	140
Максимальная скорость вращения	об/мин	1800
Максимальный расход	л/мин	59
Номинальный расход (при 1500 об/мин)	л/мин	49
Вес	кг	15

Характеристики насоса при 1500 об/мин

With oil at 21cSt (102 SUS) and at 49°C (120°F): Atmospheric inlet
For data at drive speed of 1800 r/min, see pages A.11 to A.14

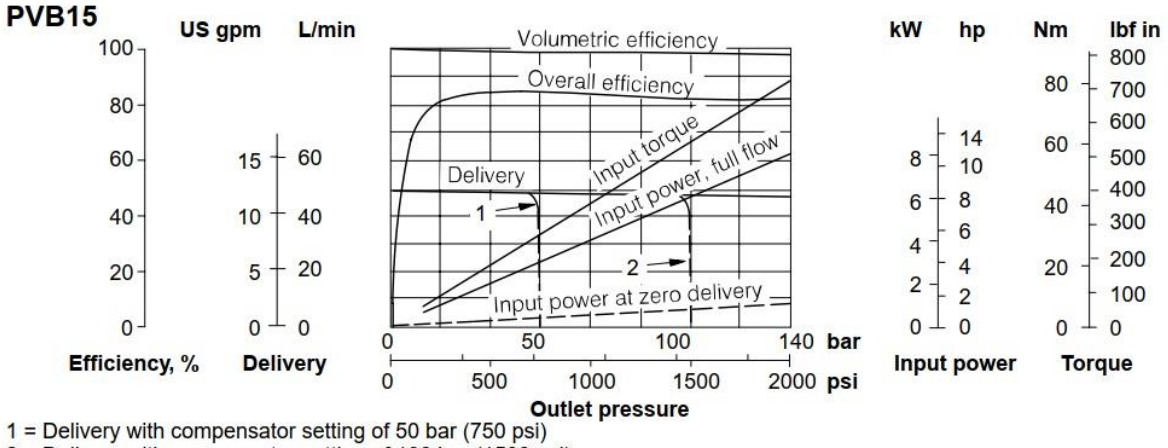

1 = Delivery with compensator setting of 50 bar (750 psi)
2 = Delivery with compensator setting of 100 bar (1500 psi)

Характеристики насоса при 1800 об/мин

With oil at 21cSt (102 SUS) and at 49°C (120°F): Atmospheric inlet
For data at drive speed of 1800 r/min, see pages A.11 to A.14

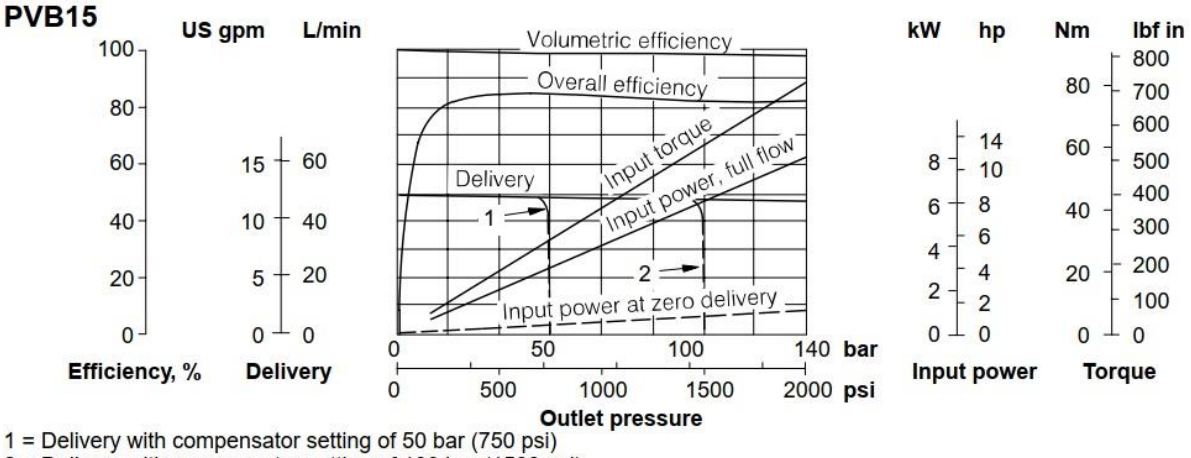

1 = Delivery with compensator setting of 50 bar (750 psi)
2 = Delivery with compensator setting of 100 bar (1500 psi)
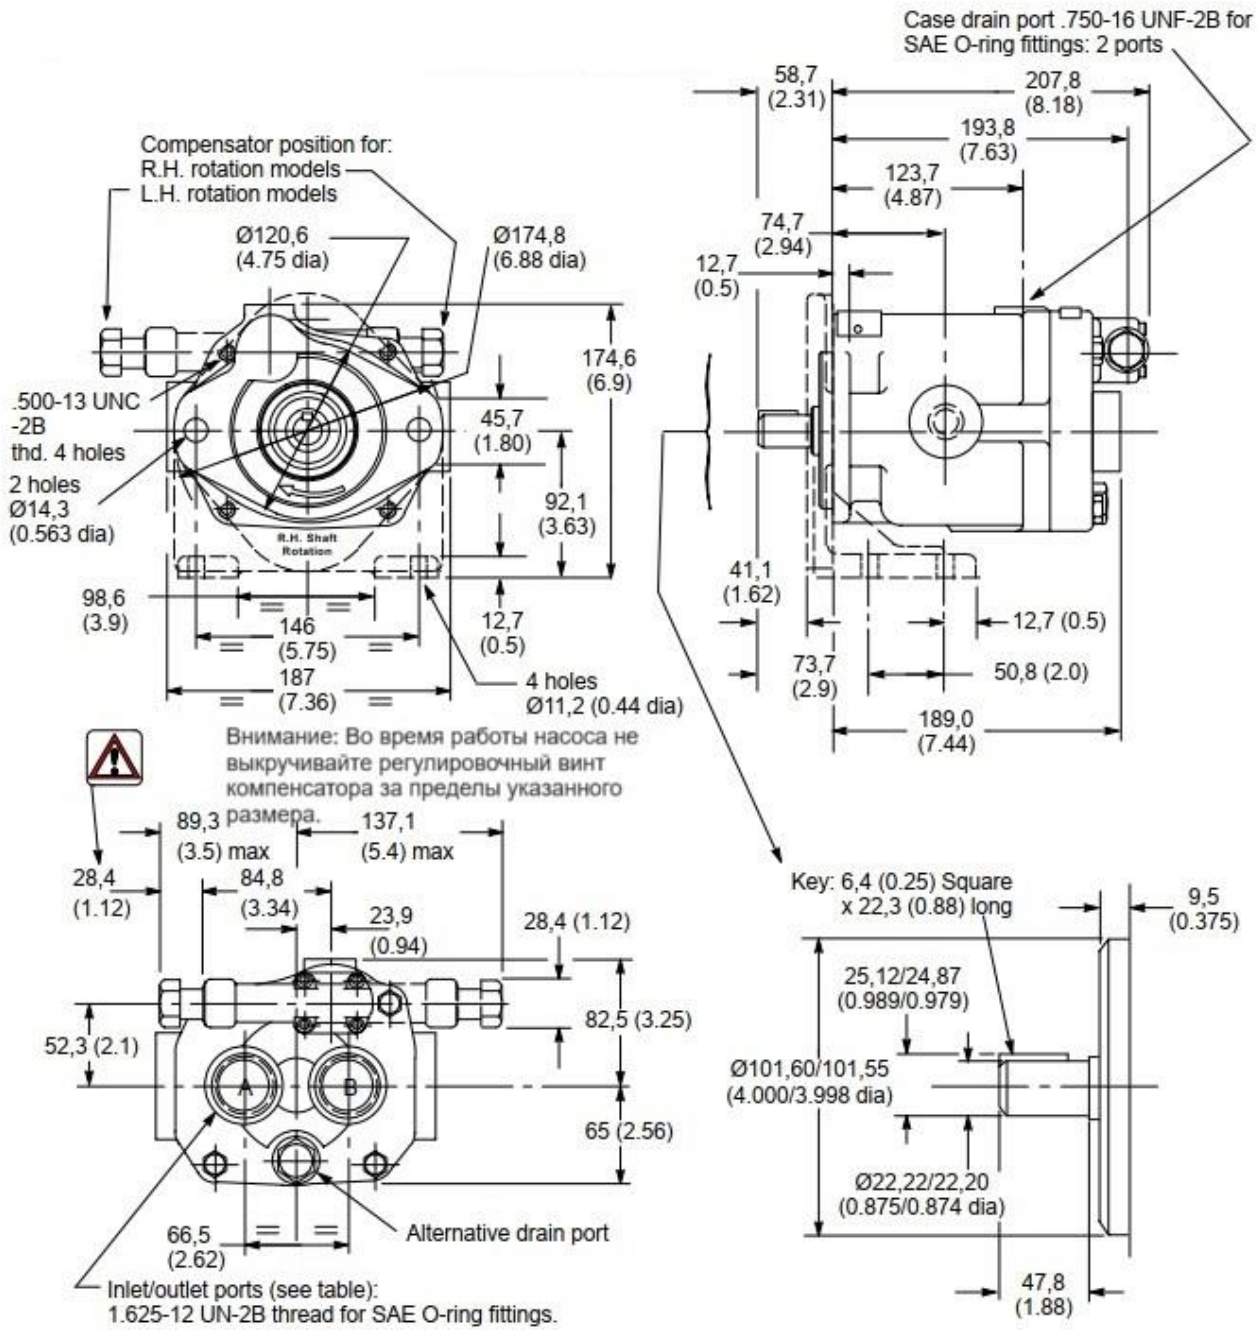
3. Габаритные и присоединительные размеры: