

AH-DRE(E)/DREM(E)...type Proportional Pilot Operated Reducing Valve

AH-DRE(E)/ DREM(E)...60S...type

Sizes 10, 25
Max. Working Pressure: 315 bar
Max. Flow: 300 L/min



Contents

Function and configuration	02
Symbols	03
Ordering code	03
Technical data	04
Electrical data	04
Characteristic curves	05
Unit dimensions	06-07

Features

- For sub-plate mounting:
- Porting pattern to DIN 24 340 form D and ISO 5781
- For installation in manifolds
- 4 pressure ratings
- Maximum pressure limitation, optional
- Digital amplifier type VT-2000 of modular design

Function and configuration

DRE/DREM type valve is a pilot operated pressure reducing valve. It is used for pressure reduction. The valve consists of pilot valve(1) with proportional solenoid (2), main valve (3) with main spool assembly (4), as well as an optional check valve (5).

Type DRE10...

The setting of the pressure in port A is dependent on the voltage present at the proportional solenoids (2). At static, proportional solenoids (2) breakaway, the connection from B to A opens and fluid can flow freely from Port B to port A via main spool (4).



When valve works, pressure fluid from port A acts on the spring load side of the main spool (4) via pilot valve with throttle (6), (7) and (8), and at the same time acts on spool (10) effected by electromagnetic force. If pressure at port A exceeds the preset value of the corresponding proportional solenoid (2), then the spool (10) opens. Signal and pilot fluid is from port A, and fluid flows to tank through spool (10) and port Y. There is pressure differential on main spool (4) which makes itself into controller position and keeps flow constant pressure in port A as same as the setting value of the proportional solenoids (2). If the pressure in the port A increases and the main spool (4) is closed, little fluid will flow to tank via hole (9) and port Y. In order to allow free-flow from port A to B a check valve (5) can be fitted.

Type DRE20...

Same principle with DRE10 in function and pilot oil drains out from channel (9) and port B. There is a flow control valve (11) fixed in the pilot valve (1) to relief the pilot oil. And the overload protector (12) in the port A can prevent the pressure from abnormally high when flow $Q=0$.


Type DREM...

A spring loaded pressure relief valve (13) can be optionally installed to prevent higher pressure in port A caused by abnormal peak voltage of proportional solenoids.

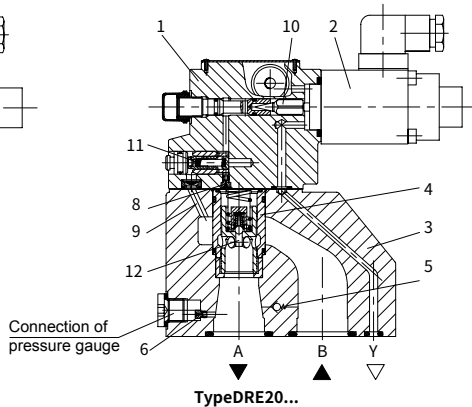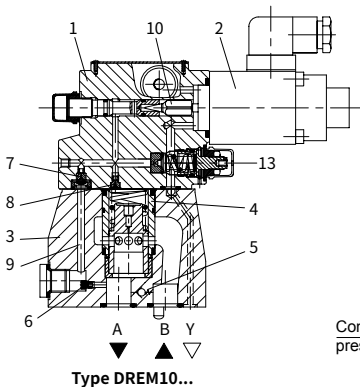


Symbols


DRE -6XJ/...YM... DREM -6XJ/...YM...





DRE -6XJ/...Y...




DREM -6XJ/...Y...



DREE -6XJ/...YM... DREME -6XJ/...YM... DREE -6XJ/...Y...



DREME -6XJ/...Y...



Ordering code

DRE					6XJ/					G24	/	/		*
<p>Without maximum pressure safety = No code With maximum pressure safety = M</p> <p>Pilot operated = No code Pilot operated valve for size 10 (do not enter nom. size) = CN Pilot operated valve for size 20 and 30 = CH (do not enter nom. size) Pilot operated valve with main spool assembly for size 10 (enter nom. size 10) = CN Pilot operated valve with main spool assembly for size 30 (enter nom. size 30) = CH</p> <p>For external control electronics = No code With integrated electronics (OBE) = E</p> <p>Nominal size 10 = 10 Nominal size 25 = 20</p> <p>Series 60J to 69J = 6XJ</p> <p>Max. pressure 50 bar = 50 Max. pressure 100 bar = 100 Max. pressure 200 bar = 200 Max. pressure 315 bar = 315</p>														
<p>Further information in plain text</p> <p>V = FKM seals No code = NBR seals</p> <p>Pilot oil drain port Y No code = Inch threaded 2 = Metric threaded</p> <p>For type DBE(M)E: A1= Command/actual value 0-10V F1= Command/actual value 4 to 20 mA</p> <p>For type DBE(M)E: K31 = With component plug, Without plug-in connector Z31 = With component plug and plug-in connector</p> <p>For type DBE(M)E, Supply voltage G24= + 24V DC</p> <p>No code = Without check valve M = With check valve</p> <p>Y= Pilot oil drain always external, separate and zero pressure to the tank</p>														

Technical data









Fluid		Mineral oil suitable for NBR and FKM seal Phosphate ester for FKM seal		
Fluid temperature range		°C	-30 to +80 (NBR seal) -20 to +80 (FKM seal)	
Viscosity range		mm ² /s	2.8 to 380	
Degree of contamination		Maximum permissible degree of fluid contamination: Class 9. NAS 1638 or 20/18/15, ISO4406		
Max. operating pressure	Port A, B	bar	315	
	Port Y		Back to tank with zero pressure	
Max. setting pressure	Port A	bar	50; 100; 200; 315	
Min. setting pressure	Port A		Dependent with Q, see characteristic curves	
Pressure at current value 0 in port A		=Min. settable pressure (see characteristic curves)		
Max. pressure limitation (stepless)	Setting pressure		setting range under max. pressure limitation	
	50 bar		10-60 ⁺²⁰ bar	
	100 bar		10-120 ⁺²⁰ bar	
	200 bar		10-220 ⁺²⁰ bar	
	315 bar		10-340 ⁺²⁰ bar	
Max. pressure limitation setting range	When rated pressure=50 bar, between 60~80 bar			
	When rated pressure=100 bar, between 120~140 bar			
	When rated pressure=200 bar, between 220~240 bar			
	When rated pressure=315 bar, between 340~360 bar			
Nominal size		10	25	32
Max. flow-rate	L/min	80	200	300
Pilot flow-rate (for pilot valve)	L/min	0.7 to 2		
Linearity	±3.5%			
Repeatability	<±2%			
Magnetic creeping	with shimmy		without shimmy	
	±2.5% P max (200Hz, amplitude 200mAss)		±4.5% P max	
Shifting time	100 to 300ms (dependent with the system)			

Electrical data

Supply voltage	DC
Min. solenoid current	mA 100
Max. solenoid current	mA 800
Coil resistance	19.5Ω at 20°C, Max. warm value :28.8Ω
Working status	Continuous
Max. working environmental temperature	+50°C
Electrical connection	Plug-in connector to DIN EN 175301-803/ISO 4400
Valve protection to DIN 40 050	IP 65
Amplifier	VT2000


Characteristic curves

(Measured at $\vartheta_{oil} = 40^{\circ}\text{C} \pm 5^{\circ}\text{C}$, using HLP46)

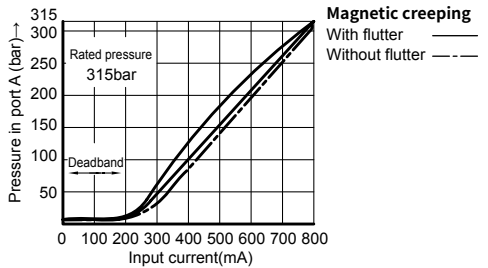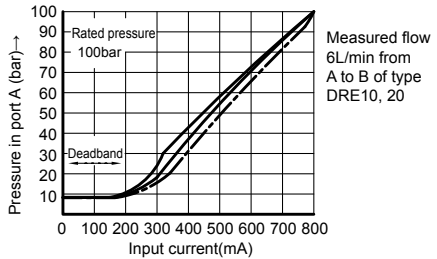
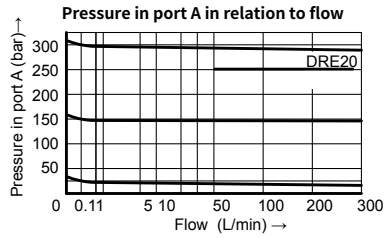
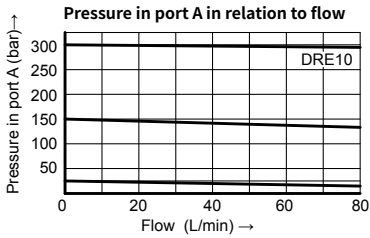


Unit dimensions

(Dimensions in mm)

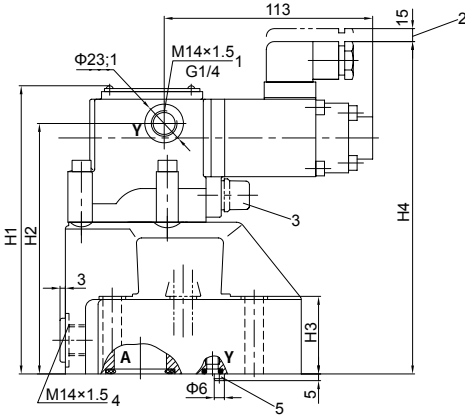

- 1 As supplied, this port is plugged.
After removal of this plug this port can also be used as an external pilot oil drain.
- 2 Space required to remove plug-in connector.
- 3 Max. pressure limitation
(its application see hereinbefore "note")
- 4 Port X used for remote controlling the DRE10 and pressure gauge connection on DRE20
- 5 Locating pin
- 6 Name plate
- 7 Pilot oil drain always external and separate to tank at zero pressure.
- 8 Dead hole
- 9 Valve fixing screw holes

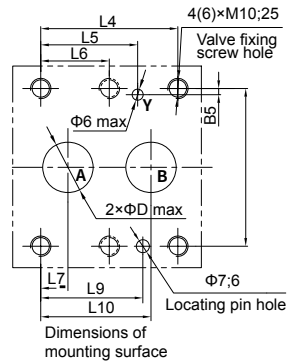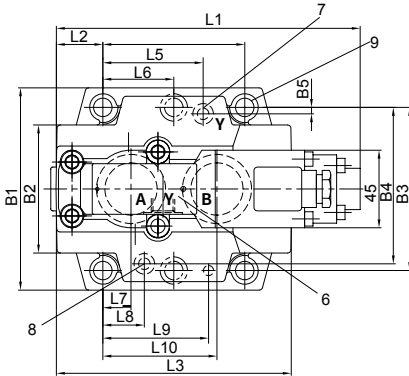

Size	B1	B2	B3	B4	B5	O-ring (port A and B)	O-ring (port X and Y)	D	H4					
10	85	50	66.7	58.8	7.9	17.12×2.62	9.25×1.78	13	188					
25	102	59.5	79.4	73	6.4	28.17×3.53	9.25×1.78	22	198					
32	120	76	96.8	92.8	3.8	34.52×3.53	9.25×1.78	30	206					
Size	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	H1	H2	H3	Weight
10	181	35.5	96	42.9	21.5	-	7.2	21.5	31.8	35.8	152	136.5	28	5.2kg
25	177	33.5	112	60.3	39.7	-	11.1	20.6	44.5	49.2	162	146.5	38	6.3kg
32	176.5	28	140	84.2	59.5	42.1	16.7	24.6	62.7	67.5	170	154.5	46	8.6kg

