

# AH-M-SEW 10...type Solenoid Ball Valve

#### AH-M-SEW10...10S...type

Size 10

Max. Working Pressure: 420/630 bar

Max. Flow: 40 L/min



# Function and configuration 02 Symbols 03 Specification 03 Technical data 04 Electrical data 04 Characteristic curves 05 Unit dimensions 06-07

#### **Features**

- Direct-acting solenoid ball valve
- Mounting face as per DIN24 340 A ISO 4401 and CETOP-RP 121H
- Free of leakage
- Keeping switching flexibility in high-pressure state
- DC Solenoid of removable coil
- Solenoid coil can rotate for 90 degrees
- Optional manual emergency operation

#### **Function and configuration**


#### AH-M-SEW10 2-position 3-way solenoid ball valve

**AH**-M-SEW10 type valve is a solenoid actuation directional seat valve, it controls start, stop and flow direction. The valve main consists of valve body (1), Solenoid (2), and valve element(3).


In the initial position, the spool is presseed to the seat by the spring(6), and by the solenoid(2) in the switching position. The force of the solenoid(2) acts by the angled lever(9) and the ball(10) on the push bar(11) with two-side seal. The chamber between the two sealing elements is connected to port P. Thus the valve element is pressure-compensated in relation to the actuating force(solenoid or spring). It means that the valve can be used up to 630 bar.

The manual emergency button(5) allows for the switching of the valve without solenoid energization.

Make sure that the specified maximim flow is not exceeded. If necessary, use a throttle insert to limit the flow.



AH-M-3SEW10 2-position TEE solenoid ball valve



AH-M-4SEW10 2-position 4-way solenoid ball valve

#### M-4SEW10 2-position 4-way solenoid ball valve

With a sandwich plate, the Plus-1 plate, under the 3/2 directional seat valve, the function of a 4/2 directional seat valve is achieved.

#### Function of the Plus-1 plate:

#### 1). Initial position:

when the Solenoid is not energized, pretention of spring (6) keeps valve element (12) on valve seat (8) on the right, oil port P is closed and port A connected to T; pressure oil supplied from oil port P push steel ball (13) to valve seat (14), upon which oil port P is connected to B and A connected to T; control oil line is connected from oil port A acts on the larger area of control piston (12), which can be used for unloading to oil tank.

#### 2). Switching position:


after the Solenoid is energized, oil port P is connected to A; pressure oil from the pump goes through the control oil line connected from port A and acts on the larger area of control piston (12); steel ball (13) is pushed to the other side of valve seat (14), thus oil port P is connected to A and B connected to T.

#### Cartridge restriction choke (model AH-M-.SEW10.10S/../B...)

To restrict flow through the valve, a restriction choke can be installed. Restriction choke is installed on port P.


# Cartridge type one-way valve (model AH-M-.SEW10.10S/../P) Cartridge type one-way valve allows oil flow in from port P and it is closed for reverse flowing.

One-way valve installed on port P.




#### Spool symbols


#### Type AH-M-3SEW10U-10S/..




#### Type AH-M-4SEW10D-10S/..




Type AH-M-3SEW10C-10S/..



Type AH-M-4SEW10Y-10S/..



#### **Specification**

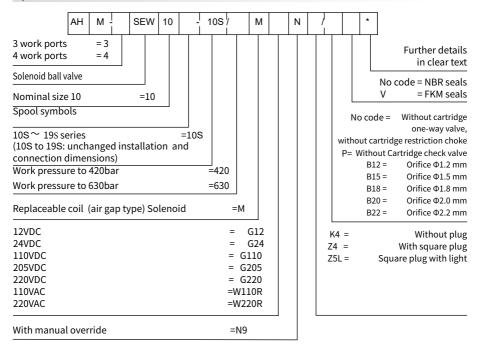

#### **Technical data**

Installat	tion position		Optional					
Environ	m ont tom n oratura		-30 to +50 (NBR seal)					
Environment temperature			°C	-20 to +50 (FKM seal)				
	Two tee Solenoidi	c directional valve						
Weight	2.0 Two four-way valve	Solenoidic direction	al Kg	3.5				
Max operation pressure Port P,		Port P, A, B	-bar	420				
		Port T	- Dai	100				
Max flov	V		L/min	40				
Fluid			Mineral oil suitable for NBR and FKM seal					
				Phosphate ester for FKM seal				
			°C	-30 to +50 (NBR seal)				
Fluid temperature range		C	-20 to +50 (FKM seal)					
Viscosity range				2.8 to 500				
Degree of contamination				Maximum permissible degree of fluid contamination: Class 9. NAS 1638 or 20/18/15, ISO4406				


#### **Electrical data**

Voltage type								DC				AC			
Available voltage V							12, 24	12, 24, 110, 205, 220 110, 220 (Only by Z5					ectifie	plug)	
Allowed voltage (deviation) %							+10 ~ -15								
Required power W								30							
Continuous power-on time					%		100								
Switching time in compliance with ISO 6403															
		DC					AC50HZ								
Pressure	L/min	On/ms (without oil off/ms tank pressure)					On/ms (without oil tank pressure)				Off/ms				
		U	С	D	Υ	U, C	D, Y	U	С	D	Υ	U	С	D	Υ
140	40	20	40	20	40	12	17	20	40	20	40	60	45	40	50
280	40	25	45	20	45	12	17	20	45	25	45	60	45	45	55
320	40	25	45	20	45	12	17	25	45	25	45	60	45	45	55
420	40	30	45	20	50	12	17	25	45	25	50	60	45	45	55
Switching frequency Time/h							Up to 15000								
IP rating as per DIN 40050							IP65								
Max coil temperature °C							+150								

#### **Characteristic curves**


(Measured at t=40° C±5°C, using HLP46)

### Δp-qv characteristic curves 3/2 solenoid ball valve




- 1 AH-M-3SEW 10 C ..., P to A
- 2 AH-M-3SEW 10 C ..., A to T
- 3 AH-M-3SEW 10 U ..., P to A
- 4 AH-M-3SEW 10 U ..., A to T

#### Δp-qv characteristic curves 2-position 4-way solenoid ball valve




- 1 AH-M-3SEW 10y ..., A to T
- 2 AH-M-3SEW 10y ..., F
- 3 AH-M-3SEW 10y ..., P to E
- 4 AH-M-3SEW 10y ..., B to T

#### Δp-qv characteristic curves Cartridge check valve




## Δp-qv characteristic curves Cartridge type restriction choke



#### **Unit dimensions**


#### ·2-position 3-way solenoid ball valve

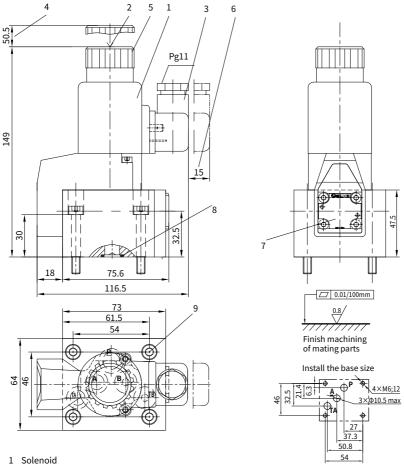

- 2 Manual override
- 3 Plug as per DIN43650 (can rotate for 90 degrees)
- 4 Remove space needed for Solenoid coil
- 5 Lock nut, tightening torque M<sub>A</sub>=4Nm
- 6 Remove space
- 7 Name plate
- 8 Oil port A、B、TA use O-ring 12×2, Oil port P uses O-ring 14×2
- 9 Valve securing screw, M6×40 GB/T70.1- class 10.9, Tightening torque M<sub>A</sub>=15.5Nm

#### **Unit dimensions**

#### ·2-position 4-way solenoid ball valve

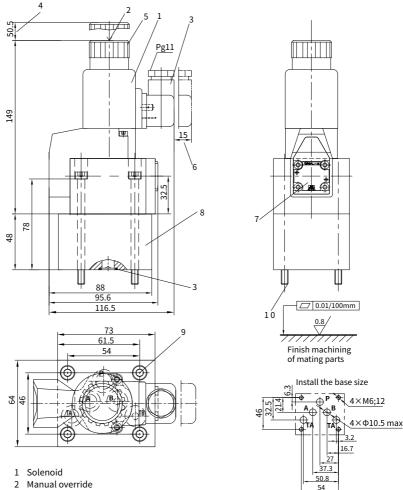

- 3 Plug as per DIN43650 (can rotate for 90 degrees)
- 4 Remove space needed for Solenoid coil
- 5 Lock nut, tightening torque M<sub>A</sub>=4Nm
- 6 Remove space
- 7 Name plate.
- 8 Connecting valve body
- 9 Oil port A,B,TA use O-ring12×2, Oil port P uses O-ring 14×2
- 10 Valve securing screw, M6×90 GB/T70.1- class 10.9, Tightening torque M<sub>A</sub>=15.5Nm